


Lithium Battery Cabinet System

OBE47/54/62/70

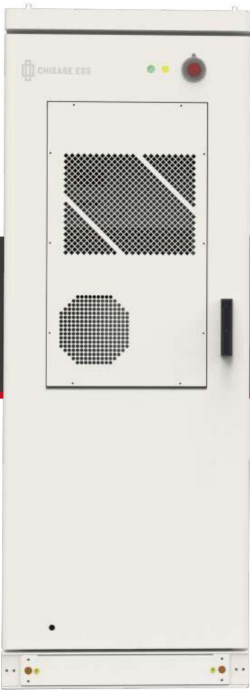

Product Features

- Longer life cycles
- Higher power density
- Max. 1C discharge current
- Higher usable energy ratio, less self-consumption
- Contains no toxic heavy metal or caustic materials
- Up to 20 cabinets can be parallel connected
- Flexibility modular design, from 47kWh to 70kWh each battery cabinet

Technical Data				
Model	OBE47	OBE54	OBE62	OBE70
Connection series	144S	168S	192s	216S
Nominal Energy (kWh)	46.08	53.76	61.44	69.12
Nominal Capacity (Ah)	100			
Nominal Voltage (V)	460.8	537.6	614.4	691.2
Operation Voltage Range (V)	403.2-518.4	470.4-604.8	537.6-691.2	604.8-777.6
Recommend Charge Current (A)	100			
Max. Continuous Charge Current (A)	100			
Recommend Discharge Current (A)	100			
Max. Continuous Discharge Current (A)	100			
Max. Parallel Quantities (system)	20			
Operation Temperature	Charge Temperature: 0°C~60°C Discharge Temperature: -20~60°C			
Operation Humidity	20~80%RH (No condensing)			
Protection Degree	IP54			
Dimension (mm)	690W x 1,950H x 1,200D			
Net Weight (kg)	850	915	980	1,045
Certification	IEC62619, CE-EMC, LVD, ROHS, IP54, UN38.3			
Communication	CAN, RS485			
Cycle Life	≥6,000 80%EOL@25°C 1P			